


Straight socket connector:solder tail single row
 Availability from:2 to 50 contacts
 Standard number of contacts 25 and 50


Ordering Information

RP3XX-X XX X X X S A08


HEIGHT OF HOUSING	1:Single-Row 2:2.1mm 22:2.2mm	NO. OF PINS PER ROW	1~40P 2~40P	0:No Pitch 1:1.27 2:2.00 3:2.54 4:7.62 5:10.16 6:15.24 7:22.86	A=1u" B=2u" C=5u" D=10u" E=15u" F=30u"	A:PBT B:PA6T C:PA9T D:LCP G:PPS H=Half gold plated Tin	LENGTH OF TERMINAL
-------------------	-------------------------------------	---------------------	----------------	---	---	---	--------------------

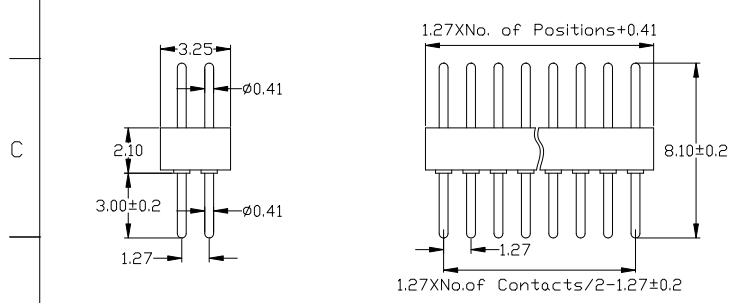

Straight socket connector:solder tail double row
 Availability from:4 to 100 contacts
 Standard number of contacts 50 and 100

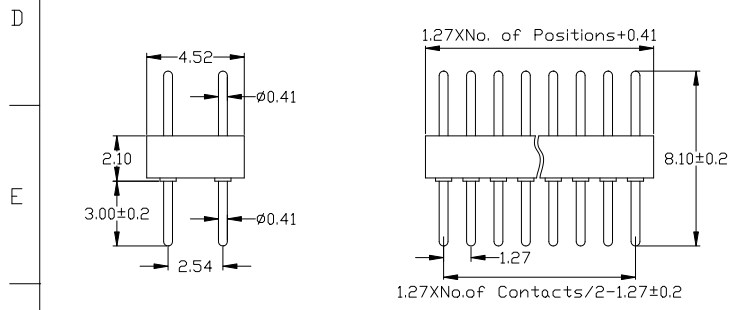

Straight socket connector:solder tail double row with 2.54mm row to row distance
 Availability from:4 to 100 contacts
 Standard number of contacts 100

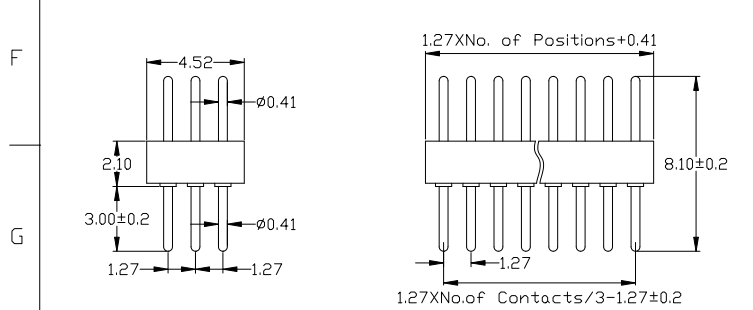

Straight socket connector:solder tail triple row
 Availability from:6 to 150 contacts
 Standard number of contacts 150

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Mating pin Ø : 0.41 mm
 Mechancial life : min 500 cycles
 Rated current : 1Amp
 Contact resistance: Max 10mΩ
 Dielectric resistance : Min 1000V_{RMS}

				OPERATION		SCALE		Fit		<h3>上海高霖电子有限公司</h3>			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RP3XX-XXXXXXS0811		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27圆孔排针 180度 L=8.1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			
					DIM	TOL							