




BL 1.5H




Pitch:3.81(3.5) mm

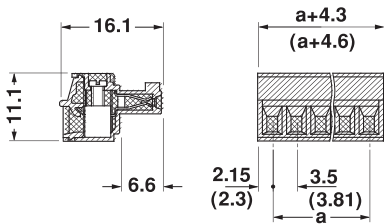


BL 1.5HF




Pitch:3.81(3.5) mm

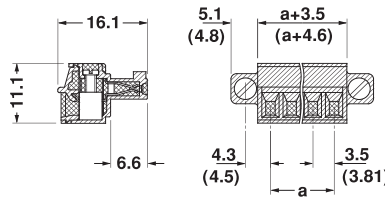

BL 1.5HS

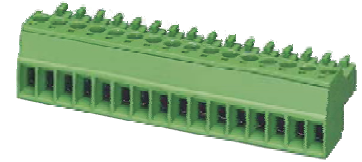

Pitch:3.5 mm

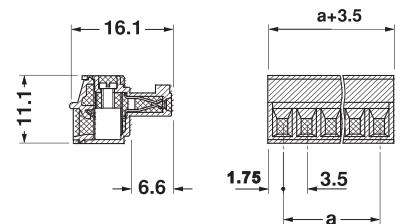

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.08-1.5	0.08-1.5	28-16	8	160
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	160 160 320				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M2/0.22-0.25				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/10	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.08-1.5	0.08-1.5	28-16	8	160
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	160 160 320				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M2/0.22-0.25				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/10	30-14

位数/No. of positions	订货型号/Order No.
2	BL 1.5H-2-3.5
...	...
24	BL 1.5H-24-3.5
2	BL 1.5H-2-3.81
...	...
24	BL 1.5H-24-3.81

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.08-1.5	0.08-1.5	28-16	8	160
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	160 160 320				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M2/0.22-0.25				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/10	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.08-1.5	0.08-1.5	28-16	8	160
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	160 160 320				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M2/0.22-0.25				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/10	30-14

位数/No. of positions	订货型号/Order No.
2	BL 1.5HF-2-3.5
...	...
24	BL 1.5HF-24-3.5
2	BL 1.5HF-2-3.81
...	...
24	BL 1.5HF-24-3.81

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.08-1.5	0.08-1.5	28-16	8	160
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	160 160 320				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M2/0.22-0.25				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/10	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.08-1.5	0.08-1.5	28-16	8	160
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	160 160 320				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M2/0.22-0.25				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/10	30-14

位数/No. of positions	订货型号/Order No.
2	BL 1.5HS-2-3.5
...	...
24	BL 1.5HS-24-3.5