


BL 2.5CAHF




Pitch:5.08(5.00) mm

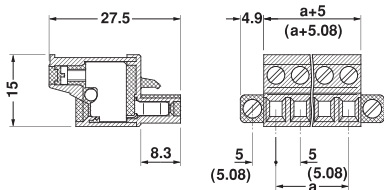

BL 2.5V




Pitch:5.08(5.00) mm



BL 2.5VF



Pitch:5.08(5.00) mm

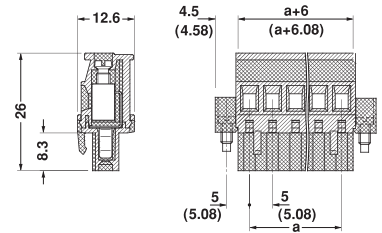

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2–2.5	0.2–2.5	24–12	12	250
绝缘材料组别				I	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	630
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(–Nm)				M3/0.5–0.6	
剥线长度(mm)				7	
线路板孔径(mm)				\	
引脚尺寸 (mm)				\	

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30–12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2–2.5	0.2–2.5	24–12	12	250
Insulating Material Group				I	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			260	320	630
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(–Nm)				M3/0.5–0.6	
Stripping length(mm)				7	
PCB Hole Diameter(mm)				\	
Pin Dimensions(mm)				\	

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30–12

位数/No. of positions	订货型号/Order No.
2	BL 2.5CAHF–2–5.00
...	...
24	BL 2.5CAHF–24–5.00
2	BL 2.5CAHF–2–5.08
...	...
24	BL 2.5CAHF–24–5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2–2.5	0.2–2.5	24–12	12	250
绝缘材料组别				I	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	630
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(–Nm)				M3/0.5–0.6	
剥线长度(mm)				7	
线路板孔径(mm)				\	
引脚尺寸 (mm)				\	

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30–12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2–2.5	0.2–2.5	24–12	12	250
Insulating Material Group				I	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			260	320	630
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(–Nm)				M3/0.5–0.6	
Stripping length(mm)				7	
PCB Hole Diameter(mm)				\	
Pin Dimensions(mm)				\	

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30–12

位数/No. of positions	订货型号/Order No.
2	BL 2.5V–2–5.00
...	...
24	BL 2.5V–24–5.00
2	BL 2.5V–2–5.08
...	...
24	BL 2.5V–24–5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2–2.5	0.2–2.5	24–12	12	250
绝缘材料组别				I	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	630
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(–Nm)				M3/0.5–0.6	
剥线长度(mm)				7	
线路板孔径(mm)				\	
引脚尺寸 (mm)				\	

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30–12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2–2.5	0.2–2.5	24–12	12	250
Insulating Material Group				I	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			260	320	630
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(–Nm)				M3/0.5–0.6	
Stripping length(mm)				7	
PCB Hole Diameter(mm)				\	
Pin Dimensions(mm)				\	

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30–12

位数/No. of positions	订货型号/Order No.
2	BL 2.5VF–2–5.00
...	...
24	BL 2.5VF–24–5.00
2	BL 2.5VF–2–5.08
...	...
24	BL 2.5VF–24–5.08