

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

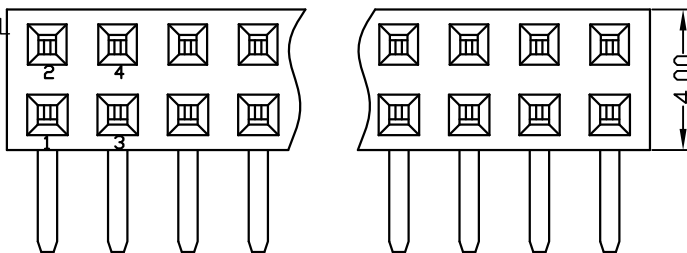

Ordering Information

F263-12 XX XX X RY

NO. OF PINS PER ROW 2~40P	NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8u"	Full Of Gold	A: PBT	A: PE Bag
A1=1u"	B1=1u"	Semi-gold	B: PA6T	B: Tape & Reel
A2=1.5u"	B2=1.5u"		C: PA9T	C: Tube
A3=2u"	B3=2u"		D: LCP	D: Tube+CAP
A4=3u"	B4=3u"			E: Tray
A5=5u"	B5=5u"			
A6=10u"	B6=10u"			
A7=15u"	B7=15u"			
A8=20u"	B8=20u"			
A9=30u"	B9=30u"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

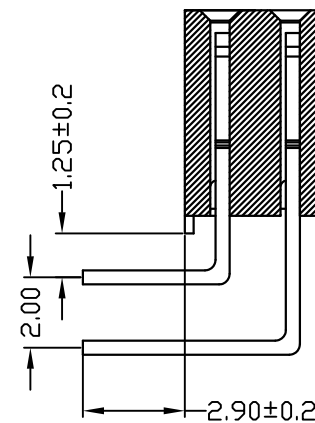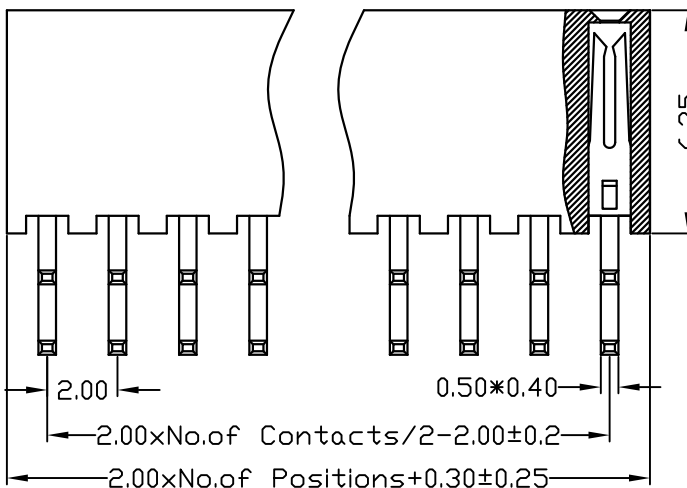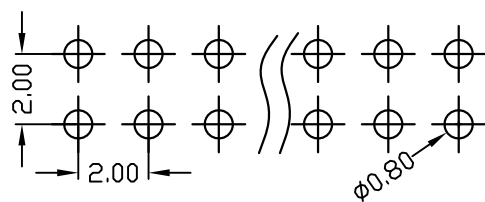

				OPERATION		SCALE		Fit		上海高霖电子有限公司	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-12XXXXXRYX1
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排母 塑高6.35 90度 Y型
				Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL				