

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

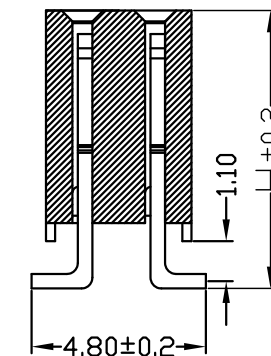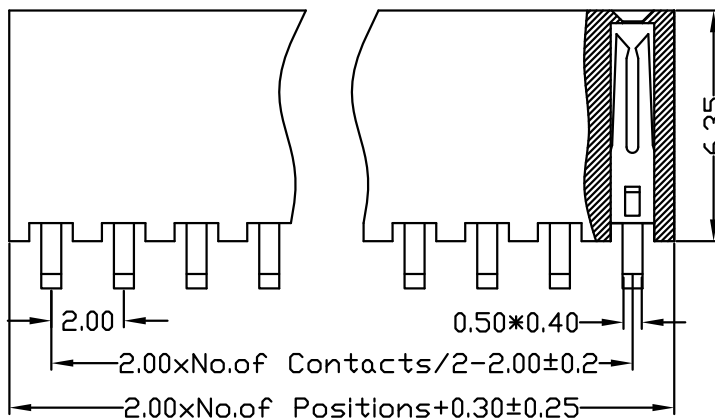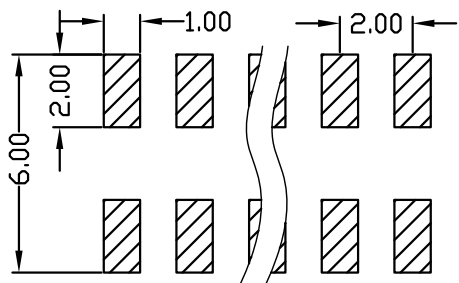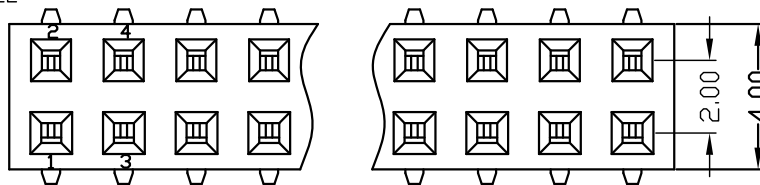

DIM"H"	7.65
--------	------

Ordering Information

F263-12 XX XX X MY

NO. OF PINS PER ROW 2~40P	Contact Plating	INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold	A: PE Bag
	A0=0.8u"	B0=0.8U"	B: Tape & Reel
	A1=1u"	B1=1U"	C: Tube
	A2=1.5u"	B2=1.5U"	D: Tube+CAP
	A3=2u"	B3=2U"	E: Tray
	A4=3u"	B4=3U"	
	A5=5u"	B5=5U"	
	A6=10u"	B6=10U"	
	A7=15u"	B7=15U"	
	A8=20u"	B8=20U"	
	A9=30u"	B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强			PART NO.	F263-12XXXXXMYX1
				X.XXX	±0.10	SHEET	1/1	CHECK				TITLE:	2.0mm 双排母 塑高6.35 SMT Y型
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.			

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

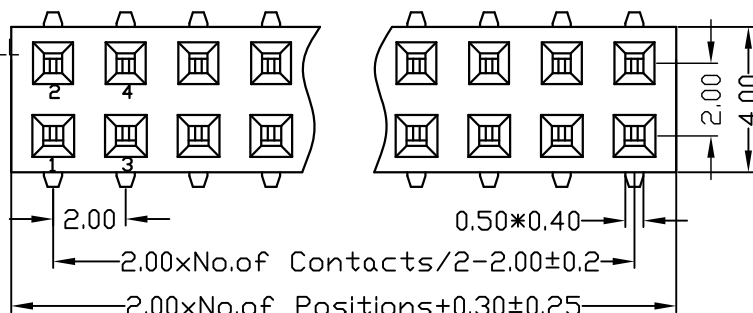

Ordering Information

F263-12 XX XX X MY

NO. OF PINS PER ROW 2~40P	Contact Plating		INSULATOR	PACKING
	Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
A0=0.8u"	B0=0.8U"	B: PA6T	C: PA9T	B: Tape & Reel
A1=1u"	B1=1U"	C: PA9T	D: LCP	C: Tube
A2=1.5u"	B2=1.5U"	D: LCP		D: Tube+CAP
A3=2u"	B3=2U"			E: Tray
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

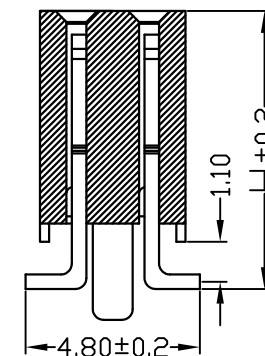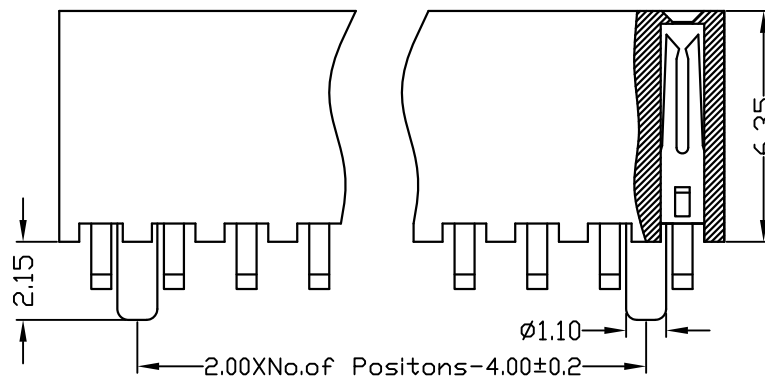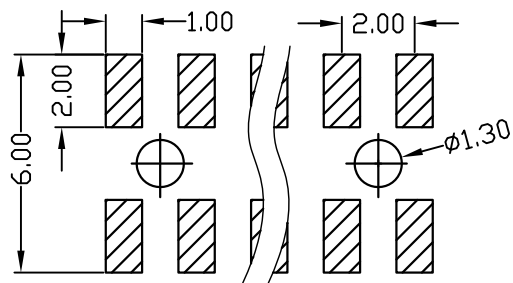

DIM"H" 7.65

上海高霖电子有限公司

OPERATION		SCALE		Fit		上海高霖电子有限公司			
X.X	±0.25	UNIT		MM					
X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-12XXXXXXMYX2		
X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排母 塑高6.35 SMT 带柱 Y型		
Angle	±3°	PROJ.	☉	APPROVE		Customer No.			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperture Range: -40°C to +105°C


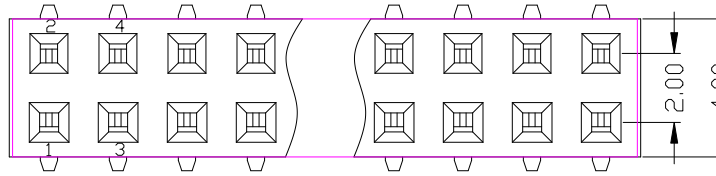


Ordering Information

F263-12 XX XX X MY AX 1

NO.OF PINS PER ROW 2-40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	B: PA6T	A: PE Bag	
A1=1u"	B1=1U"	C: PA9T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	D: LCP	C: Tube	
A3=2u"	B3=2U"		D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

麦拉
厚度0.04mm

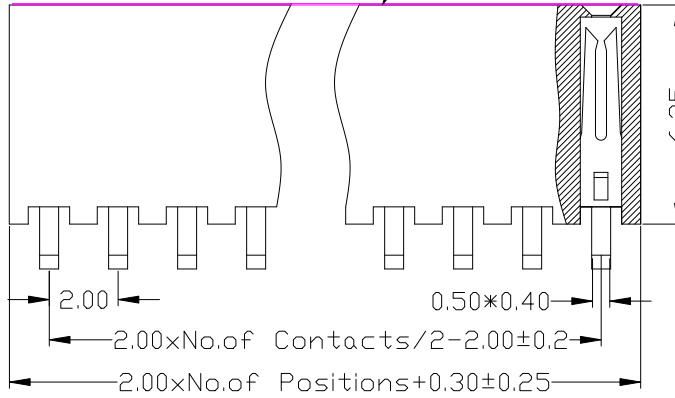

DIM"H"	7.65
--------	------

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE	Fit	上海高霖电子有限公司			
					X.X	±0.25	UNIT	MM				
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-12XXXXXXMYX1
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0mm 双排母 塑高6.35 SMT Y型
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.	