

Specifications






备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金u"MIN
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP
 Rating Current: 2 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

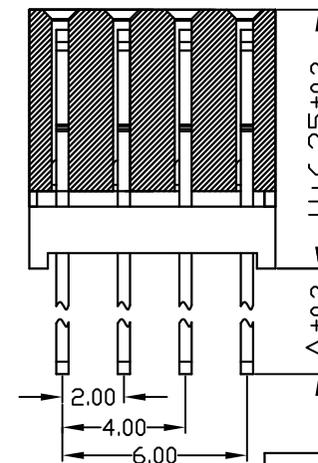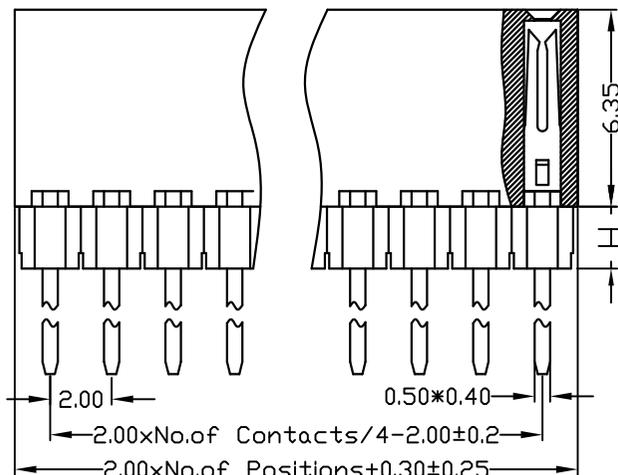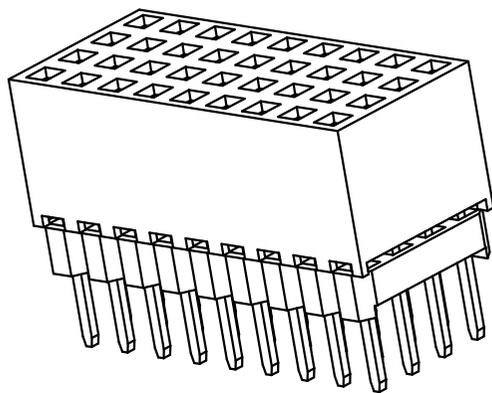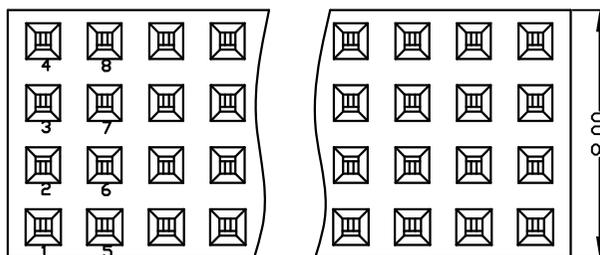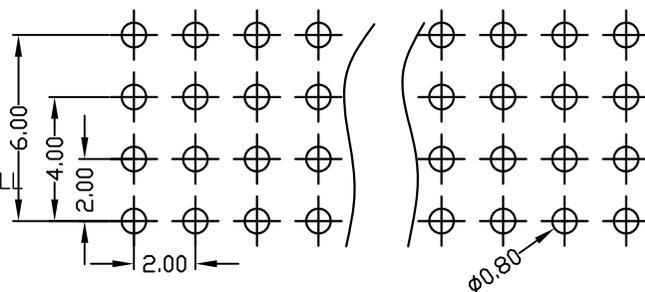

DIM"A"	2.4	2.8	3.0	3.4	13.1
"H"	1.0	1.5	2.0		

Ordering Information

F263-24 XX XX X SY

NO. OF PINS PER ROW 4-40P	Contact Plating		INSULATOR MATERIAL:	PACKING
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8U"	A1=1u"	B1=1U"	
A2=1.5u"	B2=1.5U"	A3=2u"	B3=2U"	
A4=3u"	B4=3U"	A5=5u"	B5=5U"	
A6=10u"	B6=10U"	A7=15u"	B7=15U"	
A8=20u"	B8=20U"	A9=30u"	B9=30U"	
S1=Ordinary Tin Plated S2=Matte Tin Plated S3=Tin-plated High-temperature				

上海高霖电子有限公司

		OPERATION		SCALE		FIT			
		X.X	±0.25	UNIT		MM			
		X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F263-24XXXXXSX1
		X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.00mm 排母 四排 双塑 塑高6.3 180度 Y型
		Angle	±3°	PROJ.		APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE				

Specifications

备注(Remark)

1. 材料(MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镀底30u"MIN, 表面镀金u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 2 AMP

Rating Current: 2 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.





Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C


Temperature Range: -40°C to +105°C

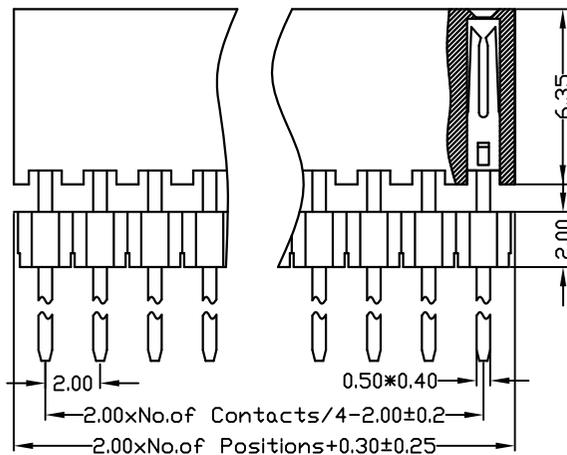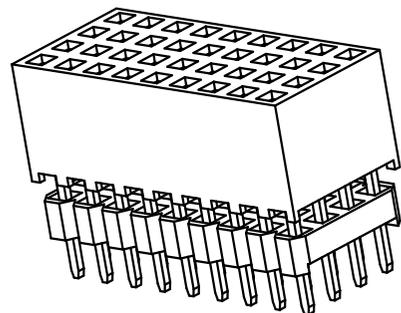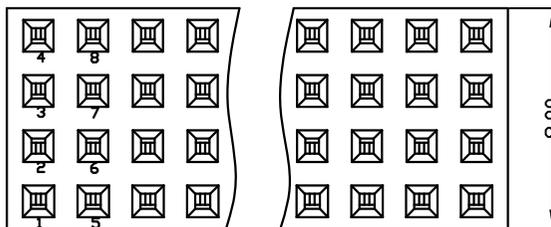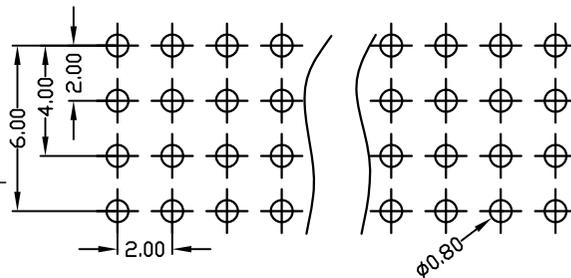

Ordering Information

F263-24 XX XX X SY

NO. OF PINS PER ROW 4-40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
	A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag
	A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel
	A2=1.5u"	B2=1.5U"	C: PA9T	C: Tube
	A3=2u"	B3=2U"	D: LCP	D: Tube+CAP
	A4=3u"	B4=3U"		E: Tray
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

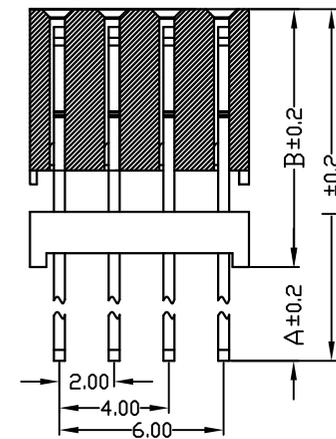

ITEM DIM	L	A		B	
11.63	2.28	3.40	9.35	8.23	
15.63	2.28	3.40	13.35	12.23	
21.59	2.28	3.40	19.31	18.19	

上海高霖电子有限公司

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	OPERATION	SCALE	FIT	SIZE	A4	DESIGN	PART NO.	TITLE:
							X.X ±0.25	UNIT	MM			卢小强	F263-24XXXXXSX2	2.00mm排母 四排 双塑 塑高6.3 180度 Y型
							X.XX ±0.20	SHEET	1/1	CHECK				
							X.XXX ±0.10	PROJ.	APPROVE				Customer No.	
							Angle ±3°							