

# Specifications

## 备注 (Remark)

### 1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.

Housing: PA6T+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

### 2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

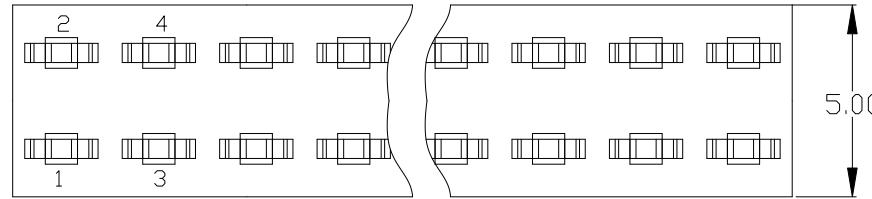

# Ordering Information

F135-12 XX XX X SY

NO. OF PINS  
PER ROW  
2~40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8U"

B1=1U"

B2=1.5U"

B3=2U"

B4=3U"

B5=5U"

B6=10U"

B7=15U"

B8=20U"

B9=30U"

INSULATOR

MATERIAL:

B: PA6T

C: PA9T

D: LCP

PACKING




A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

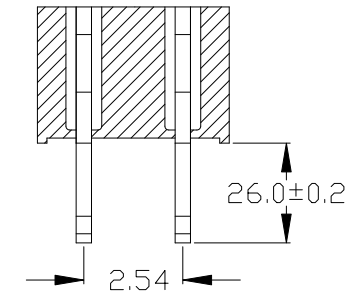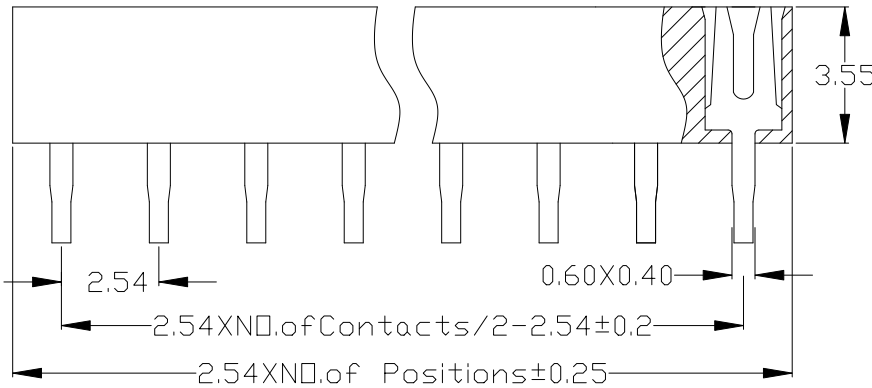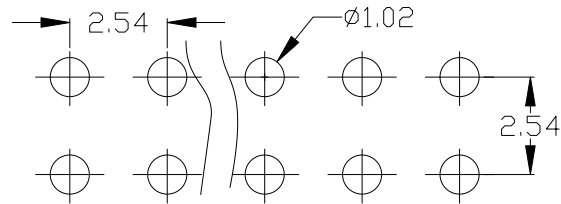

				OPERATION		SCALE		Fit		<h2 style="text-align: center;">上海高霖电子有限公司</h2>						
				X.X	±0.25	UNIT		MM								
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强					PART NO.	F135-12XXXXXXSYX1	
				X.XXX	±0.10	SHEET	1/1	CHECK						TITLE:	2.54mm 双排母 塑高3.5 180度 Y型	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	APPROVE	Customer No.						