

Specifications


备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T+30%G. F UL94V-0, 颜色: 黑色.
 Housing: PA6T+30%G. F UL94V-0, Color: Black
 端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN
 Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):




额定电流: 3 AMP
 Raring Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40°C to +105°C
 Temperature Range: -40°C to +105°C

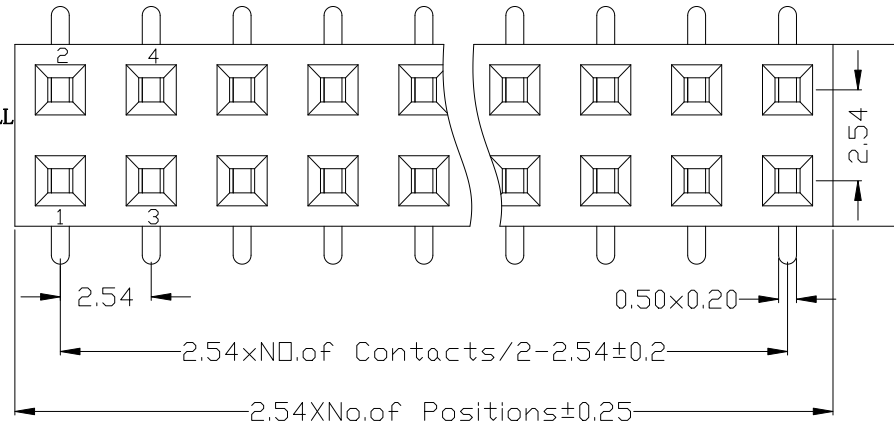

Ordering Information

F136-12 XX XX X MU AX

NO. OF PINS PER ROW 2-40P	Contact Plating	INSULATOR MATERIAL:	PACKING
A0=0.8u"	Full Of Gold	B0=0.8U"	A: PE Bag
A1=1u"	Semi-gold	B1=1U"	B: Tape & Reel
A2=1.5u"		B2=1.5U"	C: Tube
A3=2u"		B3=2U"	D: Tube+CAP
A4=3u"		B4=3U"	E: Tray
A5=5u"		B5=5U"	
A6=10u"		B6=10U"	
A7=15u"		B7=15U"	
A8=20u"		B8=20U"	
A9=30u"		B9=30U"	
	S1=Ordinary Tin Plated		
	S2=Matte Tin Plated		
	S3=Tin-plated High-temperature		

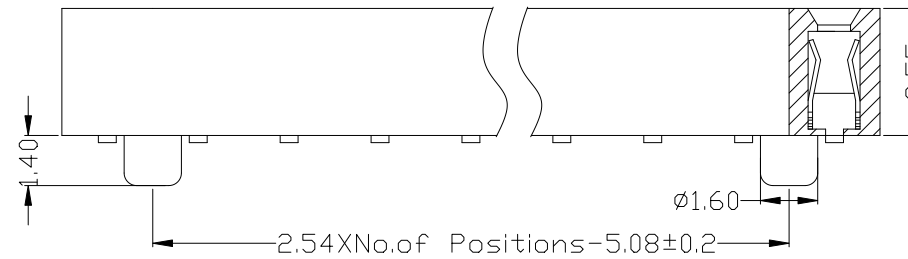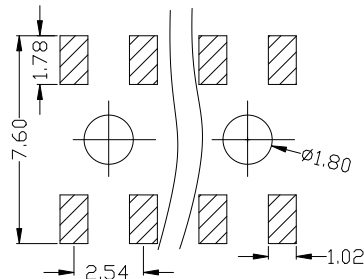

					OPERATION		SCALE		Fit		上海高霖电子有限公司			
					X.X	±0.25	UNIT		MM					
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F136-12XXXXMUX2		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高3.5 SMT 带柱 U型		
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	PROJ.		APPROVE		Customer No.			

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

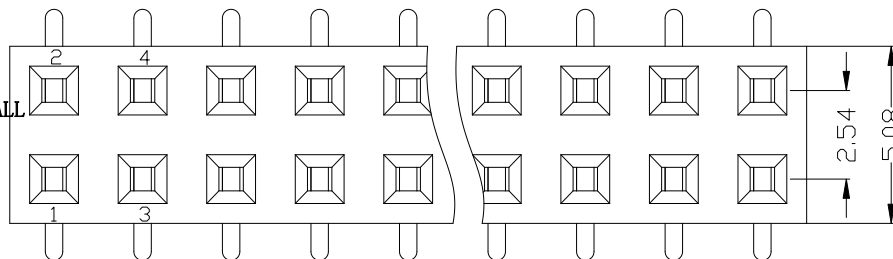

Ordering Information

F136-12 XX XX X MU AX

NO. OF PINS PER ROW 2~40P	Contact Plating		INSULATOR MATERIAL: B: PA6T C: PA9T D: LCP	PACKING A: PE Bag B: Tape & Reel C: Tube D: Tube+CAP E: Tray
	Full Of Gold	Semi-gold		
A0=0.8u"	B0=0.8U"			
A1=1u"	B1=1U"			
A2=1.5u"	B2=1.5U"			
A3=2u"	B3=2U"			
A4=3u"	B4=3U"			
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
S1=Ordinary Tin Plated				
S2=Matte Tin Plated				
S3=Tin-plated High-temperature				

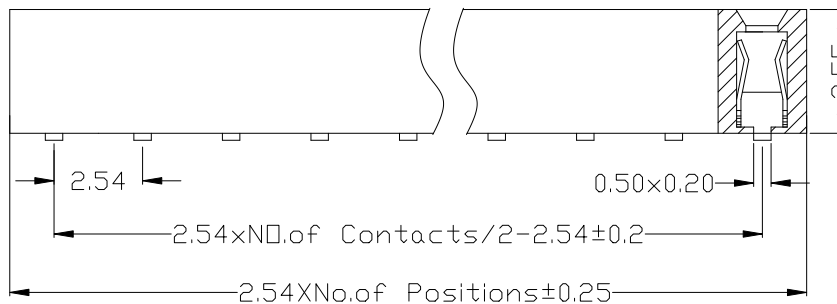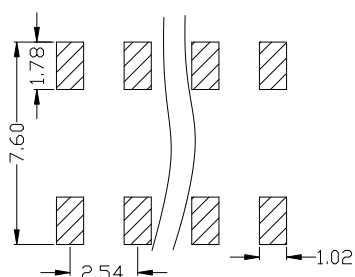

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

F136-12XXXXXXMUX1

2.54 双排母 塑高3.5 SMT U型

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1 2 3 4 5 6 7 8 9 10