

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C




Temperature Range: -40°C to +105°C

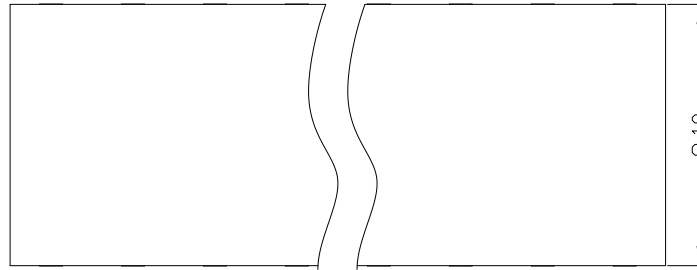

Ordering Information

F159-12 XX XX X RU AX

NO. OF PINS PER ROW 2-40P	Contact Plating Full Of Gold	Semi-gold	INSULATOR MATERIAL:	PACKING
A0=0.8u"	B0=0.8U"	A: PBT	A: PE Bag	
A1=1u"	B1=1U"	B: PA6T	B: Tape & Reel	
A2=1.5u"	B2=1.5U"	C: PA6T	C: Tube	
A3=2u"	B3=2U"	D: LCP	D: Tube+CAP	
A4=3u"	B4=3U"		E: Tray	
A5=5u"	B5=5U"			
A6=10u"	B6=10U"			
A7=15u"	B7=15U"			
A8=20u"	B8=20U"			
A9=30u"	B9=30U"			
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			

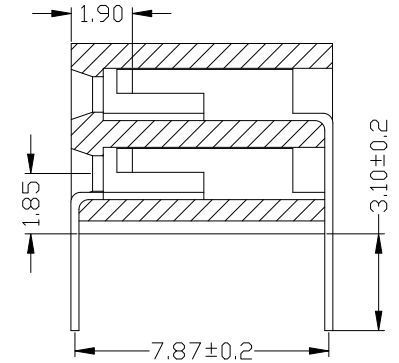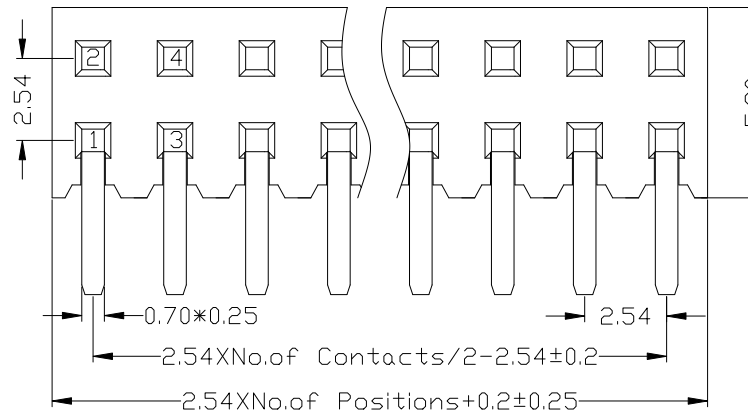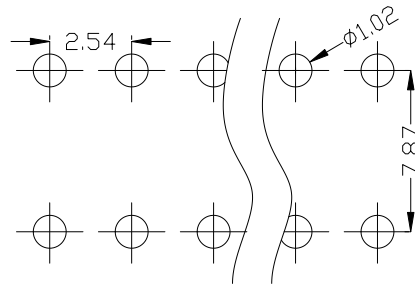

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.40	UNIT		MM					
				X.XX	±0.25	SIZE	A4	DESIGN	卢小强	PART NO.	F159-12XXXXXXRUX1		
				X.XXX	±0.15	SHEET	1/1	CHECK		TITLE:	2.54mm 双排母 塑高5.9 90度 U型 侧插		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.		APPROVE	Customer No.			
					DIM	TOL							